



QUICK BAG INSTALLATION

You will need to install the QuickBag on the HANGER component. The installation process is simple and requires no tools (although pliers may make installing the cotter pins easier). Simply follow the instructions below.

	<p>If you are installing the QUICKBAG on a <i>new</i> Original Hangman™ Triple Secure™ storage system, you can skip to the third instruction (because the storage system is not yet assembled).</p>
	<p>If you are installing the QUICKBAG on an <i>existing</i> Original Hangman™ Triple Secure™ storage system, you will need to first disassemble the HANGER from the UNIT. Carefully unload any items you have stored in the UNIT, and remove the Original Hangman™ Triple Secure™ storage system from the closet rod and lay it on a flat surface.</p> <p>Open the DOOR and remove the COTTER PINS and WASHERS from the HANGER ends within the UNIT. Pliers may make removal of the COTTER PINS easier. Set the COTTER PINS and WASHERS to the side, as you will reuse them.</p> <p>Gently pull the HANGER ends free of the UNIT. Note which way the HOOK opens (left or right) and then remove the HOOK from the HANGER.</p>




With the HANGER by itself, feed one end of the QUICKBAG on to the HANGER so that the center of the QUICKBAG is under the center of the HANGER.



Feed the HOOK back on the HANGER so that it opens the same way as before.



Feed the other side of the QUICKBAG on to the HANGER as shown.

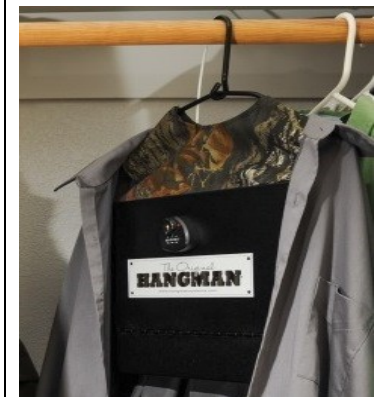

Install or reinstall the HANGER into the UNIT. Remember that the WASHER goes on the HANGER end before the COTTER PIN is installed.

Review the Original Hangman™ Triple Secure™ storage system Assembly instructions on the Support webpage as needed.

Assembly is now complete. Enjoy!